

Service plan Expert / Jumpy / Scudo


Manufacturing date from 01/2009 : from transformation Nr 6000010

GEARBOX

- Quantity : same as basis vehicle = 1.9 litres
- Oil : same as basis vehicle
- Level : no level plug, in case of appearant leaks, empty to check.
- Oil change : please see the constructor's instructions


FRONT TRANSFER BOX

- Quantity: 0.75 litre
- Oil: **YACCO BVX LS200, or equivalent to ZF TE ML-05C**
- Level: no level checking except in case of apparent leaks
- Oil change:
 - 12 / 2011 oil change every 20.000 km – **1st oil change between 1.500 and 2.500 km**
 -
 - 01 / 2012 → oil change every 20.000 km or 2 years in normal use
 - Oil change every 15.000 km or 1 year when intensive use is made - **1st oil change between 1.500 and 2.500 km**

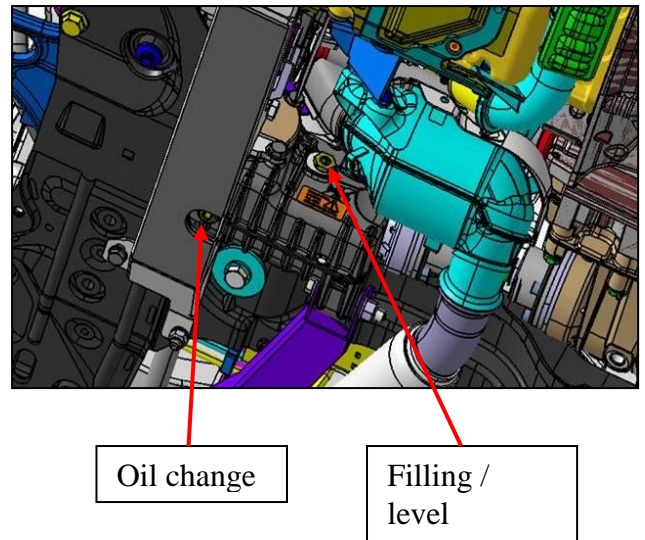

REAR TRANSFER BOX


- Quantity : 0.55 litre
- Oil : **YACCO BVX LS200, or equivalent to 80W90 according to norm API GL5 ZF TE ML-05C**
- Level : **The filling plug does not show the level**, in case of apparent leaks, empty to check.
- Oil change:
 - 12 / 2011 oil change every 20.000 km – **1st oil change between 1.500 and 2.500 km**
 -
 - 01 / 2012 → oil change every 20.000 km or 2 years in normal use OR every 15.000 km or 1 year when intensive use is made - **1st oil change between 1.500 and 2.500 km**

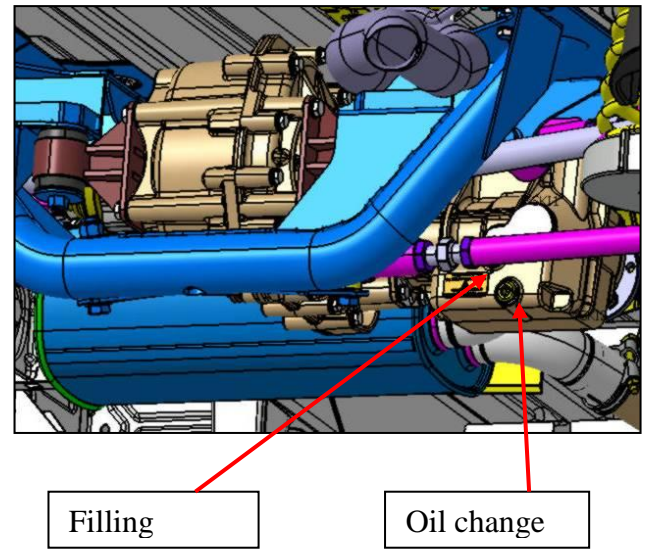

REAR AXLE


Quantity	1.15 litres
Oil	YACCO BVX LS200, equivalent to 80W90 according to norm API GL5 ZF TE ML-05C
Level	The filling plug does not show the level, in case of apparent leaks, empty to check.
Oil change → 12 / 2011	oil change every 20.000 km – 1st oil change between 1.500 and 2.500 km -----
01 / 2012 →	oil change every 20.000 km or 2 years in normal use or every 15.000 km or 1 year when intensive use is made - 1st oil change between 1.500 and 2.500 km

Rear axle driver's side

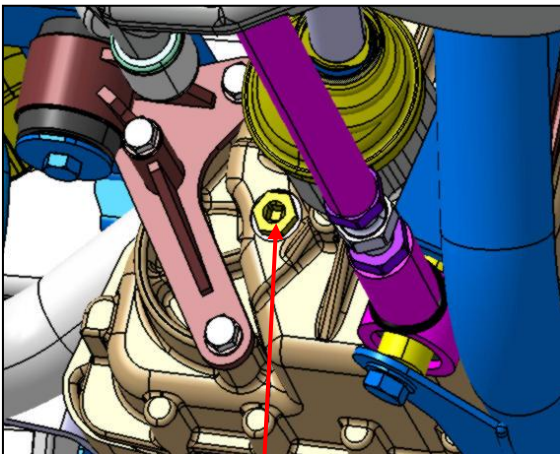

Filling

Rear axle passenger side

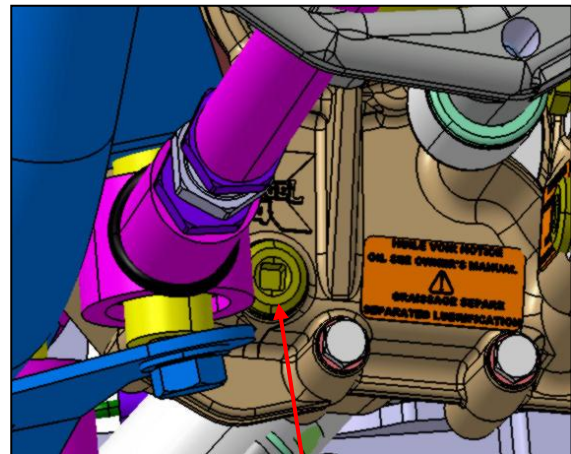

Oil change

Note: After the replacement of a rear axle or a transfer box by a new part, the **1st oil change between 1500 and 2500 km is compulsory.**

Nota: it is compulsory to grease the sliding transmission once a year or during all services.